


6 - Flame



- Hoses 6-2
- Automatic roller for oxygas hoses 6-2
- Quick action couplings 6-3
- Cutting nozzles and other flame 6-4
- Leakage control 6-5
- Heat protection 6-5

Gas	Ø (mm)	Maximum pressure (bar)	Coil length (m)	Cat N°
Single hoses				
Acetylene	6.3 x 12	10	5	W000010055
Oxygen	6.3 x 12	10	5	W000010056
Acetylene	6.3 x 12	10	10	W000010081
Oxygen	6.3 x 12	10	10	W000010057
Acetylene	6.3 x 12	10	20	W000010058
Oxygen	6.3 x 12	10	20	W000010059
Acetylene	6.3 x 12	10	40	W000010060
Oxygen	6.3 x 12	10	40	W000010061
LPG*	6.3 x 12	10	20	W000010052
LPG*	6.3 x 12	10	40	W000010062
Acetylene	10 x 16	20	10	W000010064
Oxygen	10 x 16	20	10	W000010065
Acetylene	10 x 16	20	20	W000010066
Oxygen	10 x 16	20	20	W000010067
Acetylene	10 x 16	20	40	W000010068
Oxygen	10 x 16	20	40	W000010069
LPG	10 x 16	20	20	W000010053
LPG/Acetylene*	10 x 16	20	40	W000010071
Oxygen	8 x 14	20	50	W000010079
Acetylene	8 x 14	20	50	W000010080
Argon	6.3 x 12	10	40	W000010072
Argon	10 x 16	20	40	W000010073
Twin hoses				
TWIN (Oxygen - Acetylene)	6.3 x 12	10	20	W000010077
TWIN (Oxygen - Acetylene)	6.3 x 12	10	40	W000010063
TWIN (Oxygen - Acetylene)	8 x 14	20	50	W000010078
TWIN (Oxygen - Acetylene)	10 x 16	20	20	W000010054
TWIN (Oxygen - LPG)*	10 x 16	20	40	W000010076

* Propylene excluded

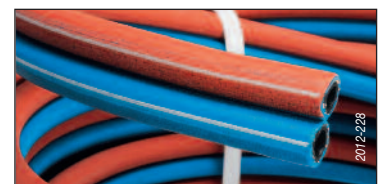

THE DATE PRINTED ON THE HOSE IS THE MANUFACTURING DATE

Automatic roller for oxygas hoses



TUBEREEL



Automatic roller for twin hoses diameter 8 or 10 mm.

- Allows the operator to choose the hose length suitable to his application
- Maximum length for inside diameter 8 mm: 20 m
- Maximum length for inside diameter 10 mm: 15 m
- Provided without hoses

Cat N°: W000260575

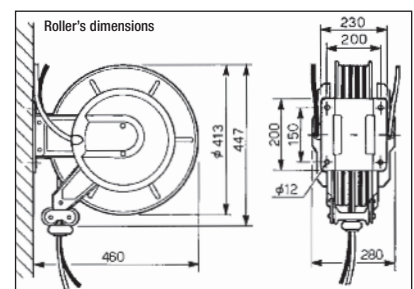

QUICKMATIC

Quick action couplings with auto-close

These couplings are available to fit to hoses or directly onto a regulator outlet.


Providing a quick release coupling, the female side always been placed at the source side of the flow.

Opening during use is possible. Closing once disconnected.

Complies with the ISO 7289 - EN 561 standards.


ISO 7289 - EN 561

Hose connection

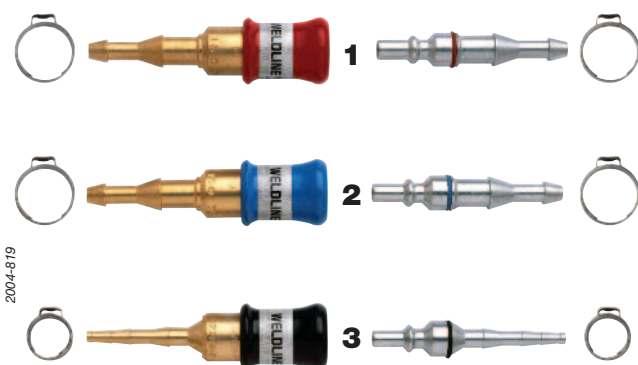


QUICKMATIC	Ø hoses (mm)	Cat N° female coupling	Cat N° male coupling
1 - fuel gases	6 and 10	W000011002	W000011005
2 - oxygen	6 and 10	W000011001	W000011004
3 - neutral gases (argon...)	4	W000011003	W000011006

Also exists in kits:

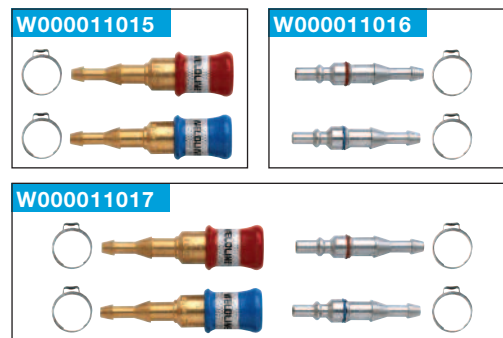

Regulator connection





QUICKMATIC	Thread	Cat N° female coupling	Cat N° male coupling	Ø hoses (mm)
4 - fuel gases	M16x150L	W000011008	W000011005	6 and 10
	3/8"L	W000011011		
5 - oxygen	M16x150R	W000011007	W000011004	6 and 10
	3/8"R	W000011010		
	1/4"R	W000011009		
6 - neutral gases (argon...)	12x100R	W000011012	W000011006	4

Blowpipe or torch connection



fuel gases	F16x150 L	W000011014	male coupling
oxygen	F16x150 R	W000011013	

G1 cutting nozzles and IC cutting nozzles

G1 profile	Gauge (mm)	Cutting thickness (mm)	IC profile
Acetylene			Acetylene
			
W000262059	7/10	3-10	W000262089
W000262060	10/10	10-25	W000262091
W000262061	12/10	25-50	W000262093
W000262062	16/10	50-80	W000262094
W000262063	20/10	80-120	W000262095
W000262064	25/10	120-200	W000262096
W000262065	30/10	200-300	W000262097
			
Propane/Tetren/Natural gas			Propane/Tetren/Natural gas
W000262066	7/10	3-10	W000262098
W000262067	10/10	10-25	W000262099
W000262068	12/10	25-50	W000262100
W000262069	16/10	50-80	W000262101
W000262070	20/10	80-120	W000262102
W000262071	25/10	120-200	W000262105
W000262072	30/10	200-300	W000262106

Tip cleaners

Cat N°: W00029090

2009-294



Used to clean welding and cutting nozzles to restore nozzle performance. Contains a range of round needle files in a metal carry case.

Spark lighter

Cat N°: W000010978



0876-66

Traditional tool with five renewal flints.

Cat N°: W000211924



2012-116

Gun model with ten renewal flints.

PROTECFLAM

Heat shield protection for walls and floors during gas welding, brazing or soldering.

PROTECFLAM

Single use

200 x 250 mm

Cat N°: W000271449

Blister pack of 3 shields



2006-397

Asbestos free

PROTECFLAM TECH

Very flexible (memory effect)

Long life duration

Both sides usable

200 x 250 mm

Cat N°: W000276078

Pack of 20 shields



2005-272R

No toxic fumes release

Inspection mirrors

• Mirror with magnetic stand

Cat N°: W000010557

2004-6-03



2004-6-02

Cat N°: W000010558

Spare part: mirror.

• Circular telescopic mirror

Cat N°: W000273291

2009-297



2009-298

For all angle viewing. Fast and accurate visual inspection of hidden areas with an almost limitless number of positions.

BUBBLE

A high-return product for leak detection suitable for all gases except high pressure oxygen > 150 bars.

- Volume: 400 ml (net)
650 ml (nominal)
- Propellant gas: nitrogen
- Base: water



2007-794

Cat N°: W00010963

1000 BULLES

A leakage controller suitable for all gases.

- Volume: 400 ml (net)
650 ml (nominal)
- Propellant gas: nitrogen protoxyde
- Base: lauryether natrium sulfate



2000-228

Cat N°: W00011090

Heat protection

THERMISHIELD

Heat shield gel

Description:

- It is designed to stop heat from travelling through most metals during welding, brazing or soldering.
- It prevents from distortion of metals and even plastics caused by the heat of a welding torch.
- Volume: 500 ml

Instructions for use:

- Shake well before use and spray the product over the surface to be protected.
- Use in well ventilated areas only.

Cat N°: W000274839



2009-249